

Wattbike Servicing Replacing Parts - Data Cable Replacement




Remove right hand cover


Loosen the chain tensioner and rotate around



Gently pull the plastic arm attached to the socket away from the block connector at the end of the data cable. There will also be one on the other side, push this one towards the left cover

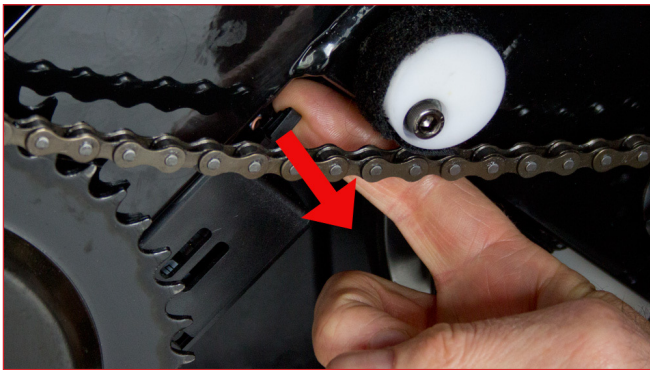

Gently pull the cable and block connector out of the socket

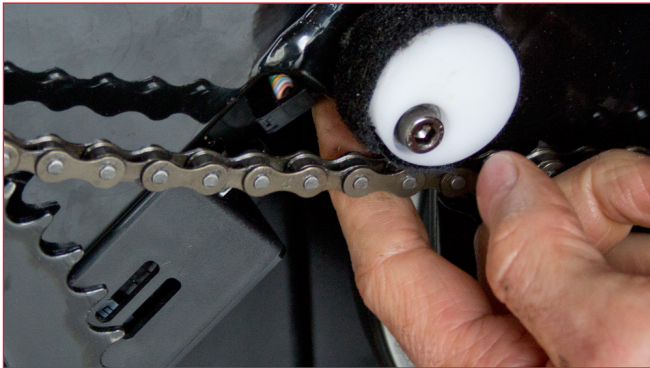


Gently push the left hand cover away from the frame and you can see the red data cable exiting from the left hand side of the frame. With a flat head screw driver lever out the rubber bung and remove from bike


Pull the red cable out from the bike



With the new cable pass it above the large pulley and between the frame of the bike

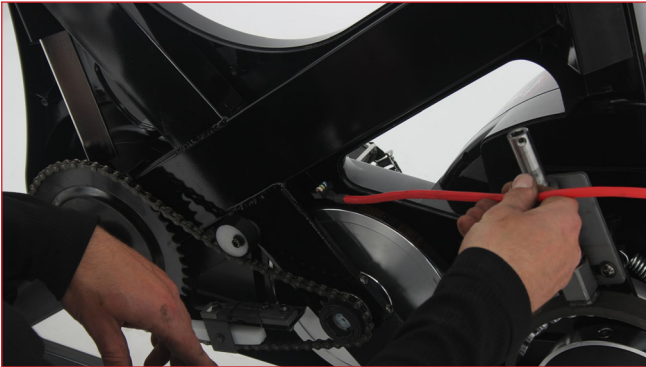


The small ridge on the block connector needs to face towards the floor and lines up with the slot in socket

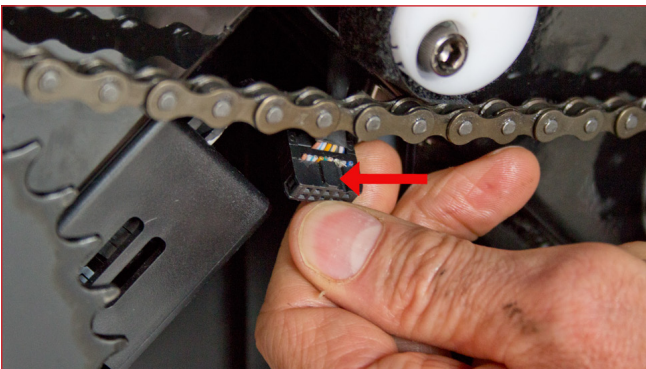

Push down from the top of the block connector. Do not force it in. Close the plastic arms to hold the plug in the socket



Route the cable between the left hand cover and the frame of the bike. Push down in cover from the top will give you a little more room to push the cable in

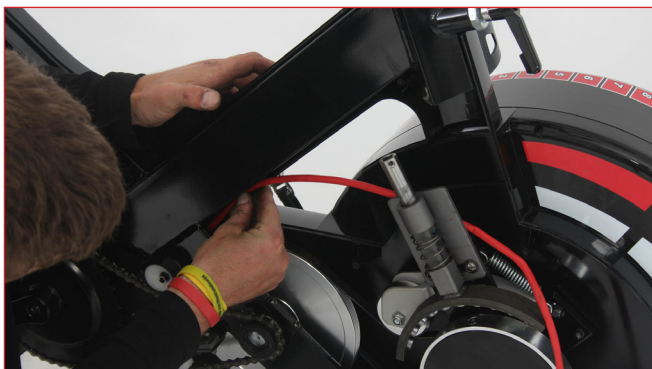

Route the cable below the screw fixing point



Gently pull the left hand cover away from the stem and route the cable to exit through the notch by the locking lever



Connect to monitor.





wattbike.com